



GENEREL INFORMATION

| | |
|----------------------------|--|
| Systemeffekt: | 150W |
| Farvetemperatur: | 4000 / 5000K |
| Total lysstrøm: | 18000lm |
| Armaturvirkningsgrad: | 120lm/W |
| Armaturfarve: | G |
| Armaturmateriale: | Stål |
| Reflektormateriale: | Aluminium |
| Omgivelsestemperatur: | -40~60°C |
| Kapslingsklasse: | IP65 (IP67*) |
| Vandalklasse: | Ikke testet |
| Isolationsklasse: | Klasse I |
| Netfrekvens: | 50Hz |
| CRI/RA: | >75 |
| Spænding: | 80-315 VAVC |
| Effektfaktor: | >0,98 |
| Chip: | Osram |
| Driver: | LPBR460-51 |
| Dæmpning: | Nej |
| Middellevetid Ta25: | >10.000 timer L90 >50.000 timer L80 |
| Vægt: | 8kg |
| Dimensioner: | H:360 x W:163 x L:320 |
| Luftfugtighed under drift: | 10%-95% |
| THD: | <10% |
| Flimmerfri: | Ja |
| Transientbeskyttelse: | Ja, indbygget |
| Termiskbeskyttelse: | Ja, indbygget |
| Produkt nr: | 4000K 09-0193-000076 5000K 09-0193-000077 |



LIGHT INNOVATION TECHNOLOGY

MÅL OG PRODUKTBILLEDER

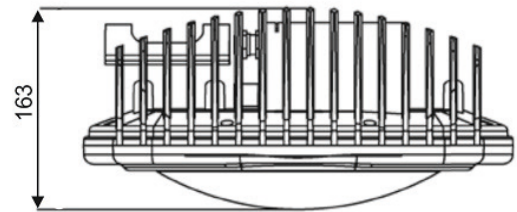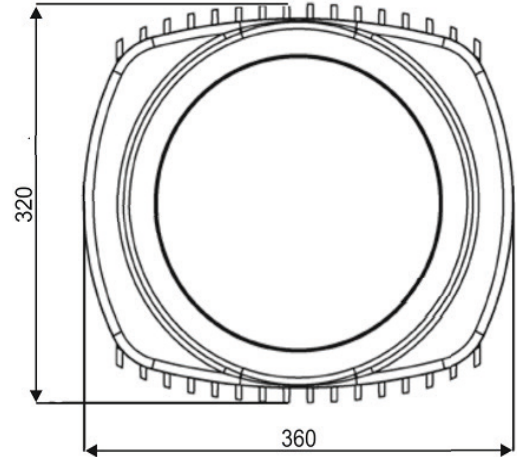

Floodlight



Street Light



Pendent Light