



## RIDE RESSECED

Ekstruderet aluminium LED profil i anodiseret sølv eller hvid finish. Høj farvegengivelse i et energibesparende og minimalistisk armatur. Ride Recessed kan bestilles med 2 eller 3 spots.

# RIDE RECESSED




## GENEREL INFORMATION

	2 spots	3 spots
Systemeffekt:	6W	8W
Spredningsvinkel:	Spot 16° (Medium 30° ved bestilling)	Spot 16° (Medium 30° ved bestilling)
Farvetemperatur:	2700 / 3000 / 4000K	2700 / 3000 / 4000K
Total lysstrøm:	180 / 190 / 220lm	270 / 290 / 330lm
Armaturvirkningsgrad:	30 / 32 / 37lm/W	34 / 36 / 41lm/W
Armaturfarve:	<input type="checkbox"/> H <input type="checkbox"/> A	<input type="checkbox"/> H <input type="checkbox"/> A
Armaturmateriale:	Ekstruderet aluminium profil	Ekstruderet aluminium profil
Kapslingsklasse:	IP20	IP20
Isolationsklasse:	Klasse I	Klasse I
Netfrekvens:	50Hz	50Hz
CRI:	>80	>80
Spænding:	220-240VAC	220-240VAC
Energi forbrug:	7kWh pr. 1000 brændetimer	9kWh pr. 1000 brændetimer
Energiklasse:	A	A
Chip:	MacAdam3	MacAdam3
Driver:	Integreret	Integreret
Dæmpning:	Nej	Nej
Middellevetid L80B10:	50.000 timer	50.000 timer
Dimension:	L:431 x H:35 x B:44	L:641 x H:35 x B:44
Produkt nr:	Spot 16° / 2700K / Hvid 24-0240-000200 Spot 16° / 2700K / Alu 24-0240-000203 Spot 16° / 3000K / Hvid 24-0240-000201 Spot 16° / 3000K / Alu 24-0240-000204 Spot 16° / 4000K / Hvid 24-0240-000202 Spot 16° / 4000K / Alu 24-0240-000205	24-0240-000206 24-0240-000209 24-0240-000207 24-0240-000210 24-0240-000208 24-0240-000211



# MÅL

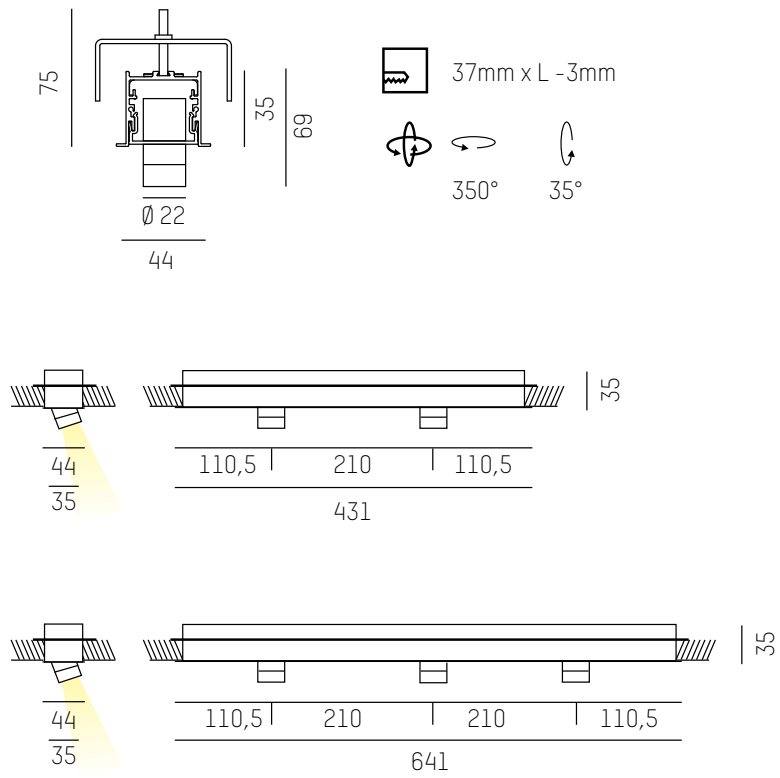

LIGHT INNOVATION TECHNOLOGY